PINNACLE 52" V2 CEILING FAN HUNTER PACIFIC LITTER HAT 1 0 HAL

Installation Locations:

Coastal, indoor and outdoor locations. The fan is also suitable for installation in a pergola or outside in a sheltered area, protected from wind

Recommended Height:

There should be at least 2.1m between the lowest point of the fan blades and the floor.

Motor:

156mm x 10mm DC motor

Made with high grade copper windings and silicone steel stator. Bearings are sealed to ensure quiet operation and long life.

Top Canopy & Downrod:

Materials: Aluminium

Product Range:

P2200 - White with White Blades

Blades:

Sizes: 1320mm (52")

Materials: ABS Polymer, UV stabilised

Blade Pitch: 12°

Extra Information:

Introduced into the HPI range in 2022 Quick Connect Blade System 9 Speed remote controller + 9 Speed DC Wall Controller Reversible

Airflow CMH:

14,444 on High speed (Speed 9)

Warranty*:

2 years in-home warranty on all electric components (control modules, remote control system, lighting and accessory wall control)

3 years standard "in home" warranty

3 years extended warranty on motor only (excluding labour)

*For full warranty details please see Hunter Pacific International's website www.hunterpacific.com.au

Standard Canopy Cover:

Suitable for flat ceilings only. An accessory 38 Degree Canopy Kit can be purchased separately for installation on raked ceiling up to 38°.

White with White Blade

Weight Including Packaging:

Complete fan: 9.1kg

Packaging Dimensions (cm):

Complete Fan: 61.5L x 29W x 31.5H

Accessories (Supplied separately):

THD Down Rod 26mm diameter (includes wire harness)

DC2460 - 91cm White Downrod DC2467 - 180cm White Downrod

38° Ceiling Kit (for pitched ceilings)

080 - Ceiling Kit White 38°


009 - T-Hook for ceiling roses

DCWC240 - 240V DC Wall Controller

WIFIM099 - Smart WiFi Module

PIXIE098 - Pixie HPI Ceiling Fan Module

	Speed 1	Speed 2	Speed 3	Speed 4	Speed 5	Speed 6	Speed 7	Speed 8	Speed 9
RPMS	73	92	148	160	175	190	200	210	215
WATTS	2.8	3.8	9.5	12.4	15.4	17.8	21.3	22.8	25.4

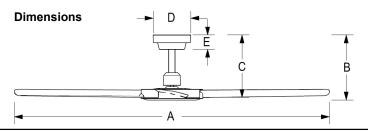

Α	В	С	D	E
1320mm	275mm	255mm	168mm	60mm